


## **FABRICATION OF COMPONENTS AS PER DWG.**

**Ref: IMW/SL//20/08/2026/02**


1. THE ORDER SHOULD NOT BE PREFERABLY SPLITTED. THE COMPREHENSIVE QUOTE CONSIDERING AVAILABILITY OF ALL COMPONENTS, FOR AT CSIO WILL BE CONSIDERED.
2. THE REQUIRED QUANTITY IS MENTIONED AND COMPONENTS SHOULD BE SEALED/PACKED AS PER THE ORIGINAL FACTORY PACKING. IF FOUND DAMAGED, WILL BE RETURNED.
3. THE PRICE SHOULD BE INCLUDING EX-CSIO DELIVERY.
4. THE VALID COC SHOULD BE SHARED.
5. PAYMENT AND OTHER THINGS AS PER CSIO NORMS
6. PL MAIL AT [harry.garg@csio.res.in](mailto:harry.garg@csio.res.in), [sunil.kumar@csio.res.in](mailto:sunil.kumar@csio.res.in)
7. QUOTE TIME 3 DAYS FROM DATE OF TENDER.
8. THE DETAILS OF USER WILL NOT BE SHARED.
9. SUPPLIER/OEM TO SHARE THE DELIVERY TIMELINES AFTER PO AND PAYMENT TERMS. PURCHASE OF COMPONENTS/ PO IS PURELY THE PREROGATIVE OF CSIO
10. PL QUOTE WITH 18% GST AND DELIVERY TIMELINES OF 10 DAYS. SHARE AND ATTACH RELEVANT COMPANY DOCUMENTS.
11. KINDLY FILL ALL THE RELEVANT FIELDS MENTIONED IN THE TENDER AND STRIKEOUT WHICHEVER IS NOT APPLICABLE.





IF IN DOUBT ASK

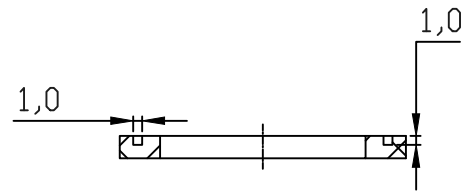

SECTION C-C

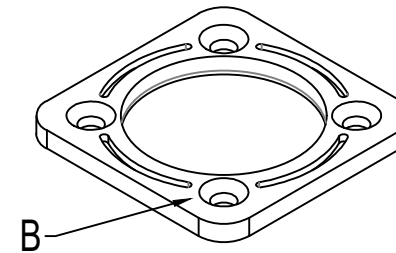

ISOMETRIC VIEW

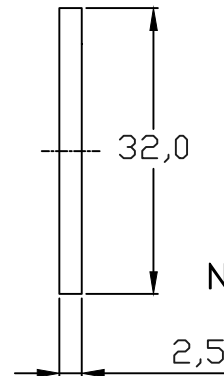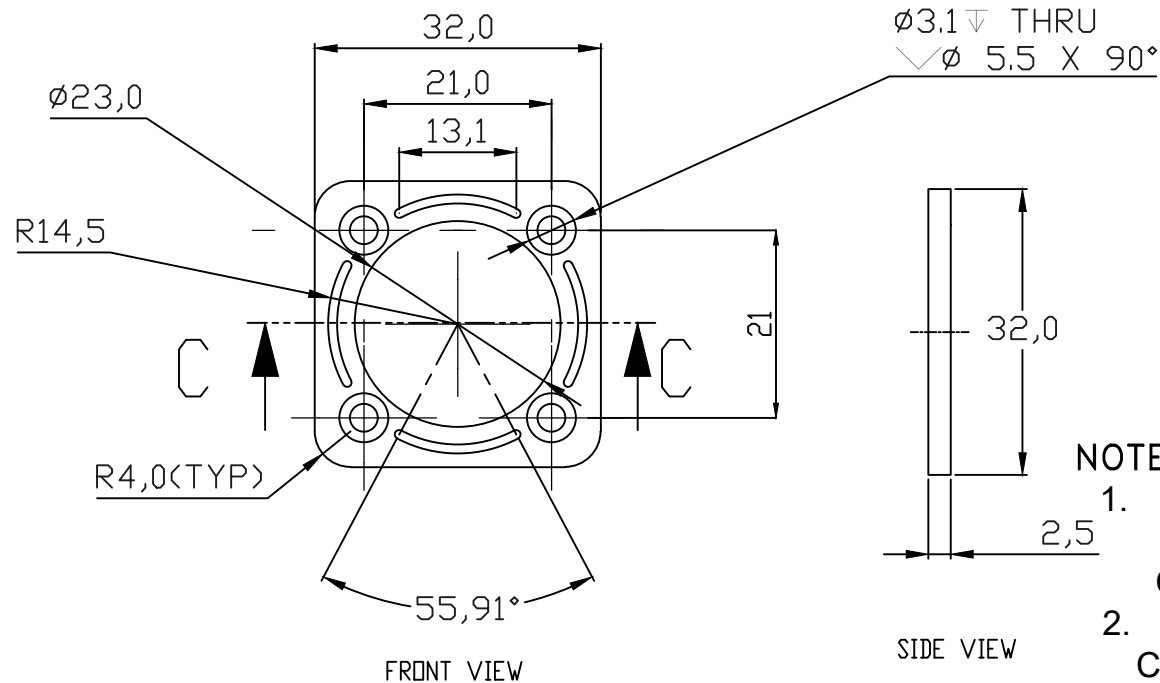

## NOTE:

1. Surface marked as "B" will be Dull Black Anodised with MIL-DTL-5541F, TYPE-1, CLASS-1A AND CLASS-3 (OUTER SURFACE).
2. All other surface except marked "B" will be CHROMATISED (INNER AND OUTER) with standard ASTM:B449-93.

UNLESS OTHERWISE STATED

1. DIMENSIONS ARE IN mm.
2. LIMIT  $\pm 0.2$ ;  $\pm 30'$
3. SURFACE FINISH  $\frac{1.6}{\sqrt{}} (CLA)$
4. ROUND OFF SHARP EDGES

## MATERIAL

BSL168-T6511

## SPEC.

----

## HEAT TRT.


----

## SPEC.

----

## PROTECTIVE TRT. SPEC.

(a): CHROMETISED-ASTM:B449-93  
 (b): DULL BLACK ANODISATION  
 -MIL-DTL-5541F, TYPE-I, CLASS-1A  
 and CLASS-3




EST.WT.(g)


---

BEZEL  
SERVICE LIGHT


IF IN DOUBT ASK

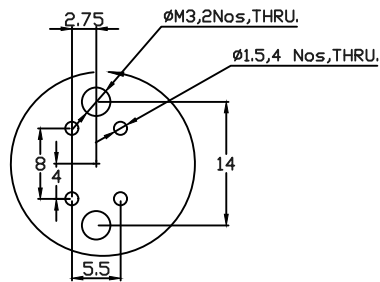



DETAIL OF B

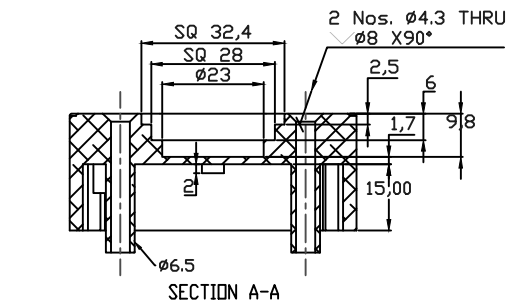


SECTION A-A




FRONT VIEW

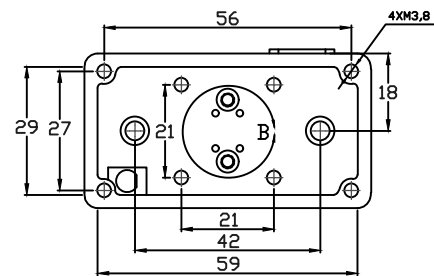


BOTTOM VIEW

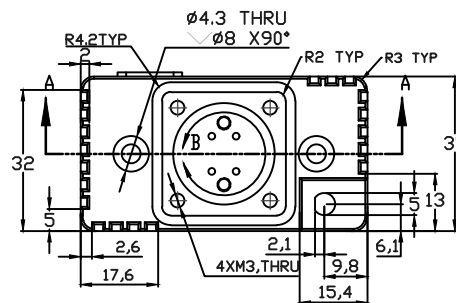

TOP VIEW



SIDE VIEW

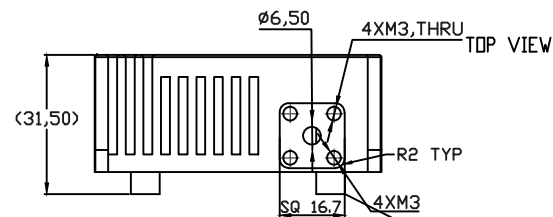

BACK VIEW

**NOTE:**

1. Surface marked as "B" will be Dull Black Anodised with MIL-DTL-5541F, TYPE-1, CLASS-1A AND CLASS-3 (OUTER SURFACE).
2. All other surface except marked "B" will be CHROMATISED (INNER AND OUTER) with standard ASTM:B449-93.